


PVC

Glass fibre braided sleeving with PVC coating

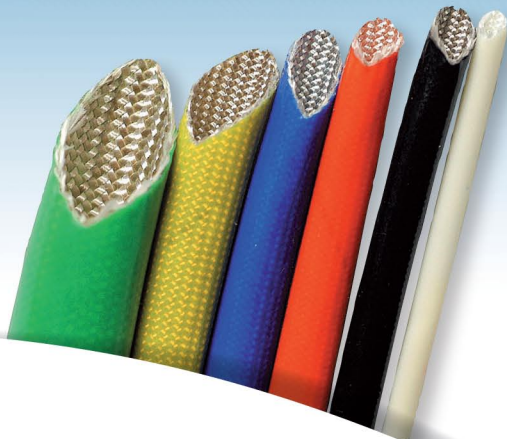

Standards*

- Compliant with directive RoHS 2002/95/CE
- NF EN 60684-1 (10/2003)
- NF EN 60684-2 (01/1998) modified by NF EN 60684-2/A1 (12/2003), NF EN 60684-2/A2 (05/2006)
- NF EN (CEI) 60684-3 406 to 408 (02/2003)

Colours and packagings

- Manufactured diameters : from 0.5 to 14 mm
- Standard colour : yellow
- Other colours : green, blue, red, black, orange, white

Applications



Characteristics

- Temperature class : B
- Continuous working temperature : from -20°C to +130°C. Peaks at +160°C
- Dielectric strength : 3kV
- Flammability : self-extinguishing
- Good mechanical resistance
- Resistance to transformer oils according to UTEC 93641
- Good compatibility with class B impregnation varnishes
- Good behaviour with liquid fuels : no decomposition
- Very flexible
- Watertight

- Standard packaging : rolls
 - diameter 0.5 to 4 mm : 200 m
 - diameter 4.5 to 12 mm : 100 m
 - diameter 14 mm : 50 m

Inner diameter (mm)	0.5	0.8	1	1.5	2	2.5	3	3.5	4	4.5	5	6	7	8	9	10	12	14
Tolerance inner diameter (± mm)	0.15	0.2	0.2	0.2	0.2	0.2	0.25	0.25	0.25	0.25	0.25	0.25	0.25	0.3	0.3	0.3	0.3	0.3
Minimum wall thickness (mm)	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.4	0.4	0.4
Maximum wall thickness (mm)	0.5	0.5	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.75	0.9	0.9	0.9	0.9	0.9

*Our products pass all or parts of requirements for the above-mentioned standards. The technical information written on our datasheets correspond to the most recent knowledges we have on those products, but the user is not exempted to verify the performances in the real particular context of application.

